

NEW
PRODUCTS & FEATURES

Distributed By:
 **camlab**

WELCH
by Gardner Denver

CRV*pro*

Your Robust Vacuum Pump



CRV*pro* **2,4,6,8,16,24,30**



Explosion Proof Motor cUL Listed



CRVpro 2

Exhaust Filter
with Drainback Feature

CRVpro

Your Robust Vacuum Pump

Discover the evolution of two-stage rotary vane vacuum pumps. Built to last. Born to perform. And designed to simplify your work. Meet the robust vacuum pump series – CRVpro.

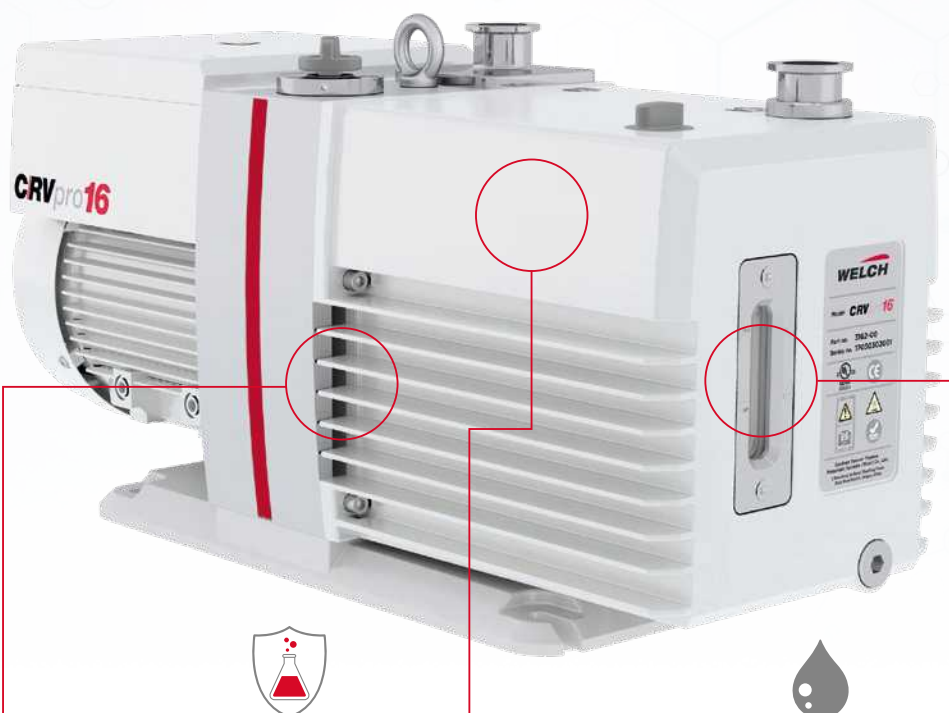

COOL RUNNING

Enhanced air flow allows the pump to run 10°C cooler than standard rotary vane pumps. The lower temperature leads to reduced chemical activity within the pump and slows down rates of oil consumption.



INTERNAL SURFACE PROTECTION

Inside surface of the oil case has a PTFE coating and the outer surface of the pumping module has a black oxide coating. Both coatings act to slow metal corrosion and, when coupled with foreline traps, extend service interval.



LARGE OIL CAPACITY

Chemical vapors that sublime from the foreline cold trap into the pump oil are more diluted due to the larger oil capacity. This minimizes the rates of oil breakdown and reduce chemical attacks within the pump.

HIGHEST RELIABILITY

LONG PRODUCT LIFESPAN

LESS MAINTENANCE

EXTENDS SERVICE INTERVAL

YOUR BENEFITS

Highest reliability for stable operation and long product lifespan

- ✓ Reduced risk of chemical attacks and oil breakdown by diluting chemical vapors with a larger oil chamber
- ✓ Slowing down corrosion by cool running operation
- ✓ Provides a measure of protection from sublimed chemical vapors with coating on pump module and oil case

Extended oil change intervals for less maintenance costs

- ✓ Less oil consumption by cool running operation
- ✓ Extended usability of oil due to high dilution effect by a larger oil chamber



1 LOW NOISE LEVEL

Exceptionally quiet for undisturbed work.

2 FORCED OIL LUBRICATION

Ensures moving parts are bathed in fresh oil. Equilibrates temperature, minimizes oil breakdown, and prolongs mechanical life.

3 ANTI-SUCK BACK VALVE

- 3 Prevents oil from being sucked into application in the event of a power failure.

4 GAS BALLAST WITH INERT GAS OPTION

Minimizes entrained chemicals in pump oil. Protects pump from condensable liquids from application such as water, acetyl nitrile, etc.

5 cUL AND CE CERTIFICATION

Compliance with local regulations and safety directives for safety operation.









6 SIZED TO FIT YOUR APPLICATION

Modern and compact design to fit different applications and performance requirements.

DUAL VOLTAGE MOTOR

- 7 Dual voltage motors meet IP54 standard. Motors of CRVpro 2,4,6,8 are switchable from 115V to 240V for global use excluding 100V and 200V pump versions. Each pump includes power cord suitable for country use.

APPLICATIONS

SCHLENK LINE	FREEZE DRYER	SHORT PATH	HVAC	VACUUM OVEN	GLOVE BOX	MASS SPECTROMETER	INDUSTRIAL APPLICATIONS
							
CRVpro 4/6	CRVpro 4/6/8	CRVpro 8/30	CRVpro 8	CRVpro 8	CRVpro 8/ 16/24/30	CRVpro 16/24/ 30	CRVpro 4/6/ 8/ 16/24/30

TECHNICAL DATA

PARAMETER	UNIT	CRVpro 2	CRVpro 4	CRVpro 6	CRVpro 8	CRVpro 16	CRVpro 24	CRVpro 30
Free air displacement								
– @ 50 Hz	m³/h (l/min)	2.5 (41.7)	4 (67)	6 (100)	8 (133)	18.3(305)	26.2 (436)	33.1(551)
– @ 60 Hz	CFM (l/min)	1.8(50)	2.8 (78)	4.2 (118)	5.6 (158)	12.8(363)	18.3(519)	22.1(627)
Ultimate pressure								
– Without gas ballast partial	mbar (Torr)	3x10 ⁻⁴ (2x10 ⁻⁴)	5x10 ⁻⁴ (4x10 ⁻⁴)			3x10 ⁻⁴ (2x10 ⁻⁴)		
– Without gas ballast total	mbar (Torr)	3x10 ⁻³ (2x10 ⁻³)	2x10 ⁻³ (1.5x10 ⁻³)			3x10 ⁻³ (2x10 ⁻³)		
– With gas ballast total	mbar (Torr)	9x10 ⁻² (7x10 ⁻²)	7x10 ⁻² (5x10 ⁻²)			6x10 ⁻³ (5x10 ⁻³)		
Connection flanges	NW	16	16			25		
Hose connection, inlet ¹	ID Tubing	7/16" (11mm)	5/8" – 3/4" (16–19mm)			3/4" (19mm)		
Ambient temperature	°C	10–40						
Noise level (50 Hz)	dB (A)	≤50	50			55		
Oil capacity	ml	450	1150		1000	2400	2200	2100
Motor speed	rpm 50/60 Hz	1450/ 1740				1450/ 1750		
Motor power	kW 50/60 Hz	0.27/0.3	0.37/0.4			0.7/0.85		
Weight	kg (lbs.)	15(33)	21(46.3)	22 (48.5)	22.5 (49.6)	37 (81.6)	38.5 (84.9)	39.5 (87)
Dimensions L x W x H	mm (inch)	380x138x235 (15.1/5.4/9.2)	463/ 157/230 (18.2/6.1/9.1) ²			569/206/289 (22.4/8.1/ 11.4)		

Note 1: Requires a hose barb adapter, included in pump versions with suffix -01. Note 2: Dimensions listed are when handle is removed. Handles are included in all CRVpro pumps.


ORDERING INFORMATION



Every pump is supplied with Welch vacuum pump oil, two centering rings, and two clamps. Ready for use after oil filling.


DESCRIPTION
115V/ 60Hz; 1phase motor with line cord US-plug (115VNEMA 5-15),hose barb adapter (NW16 5/8"), flange adapter NW16 to NW25.
115V/ 60Hz; 1phase motor with line cord US-plug (115VNEMA 5-15);3/4" Flare fitting for refrigeration connection.
115V/ 60Hz; 1phase motor with line cord US-plug (115VNEMA 5-15);hose barb adapter (NW 25 3/4").
220-240V / 50Hz; 230V / 60Hz; 1phase motor with line cord EU-plug (CEE 7/4), line cord US-plug (230V NEMA 6-15), hose barb adapter (NW25 3/4"). CRVpro 2,4,6,8include flange adaptor NW16 to NW25.
220-240V / 50 Hz; 230 V / 60 Hz, 1phase motor with line cord EU-plug (CEE 7/4), line cord UK-plug (BS1363), line cord US-plug (Nema-5).
220-240V/50 Hz, 230V/60Hz with CN Plug (AS/NZS 3112).
208-230/460V; 50/60Hz, 3 phase.
NEW Pump with explosion proof motor. 115V/208-230V,60Hz, 1phase, cUL listed.
NEW Pump with explosion proof motor. 110/220V,50 Hz.
Seal kit. Includes all seals which should be changed when performing maintenance.
Service kit. Includes seals and high wear parts such as vanes that may need to be changed when performing maintenance.
Side fitting to connect insert dry gas via 3.5mm ID flexible tubing

Note 1: CRVpro 2,4,5,6,8 are switch selectable between 115V60 Hz and 230 50/60 Hz operation; CRVpro 16,24, and 30 models are not switch selectable; they are dedicated to either 115V60 Hz or 230V 50/60 Hz. Motors include overload protection.

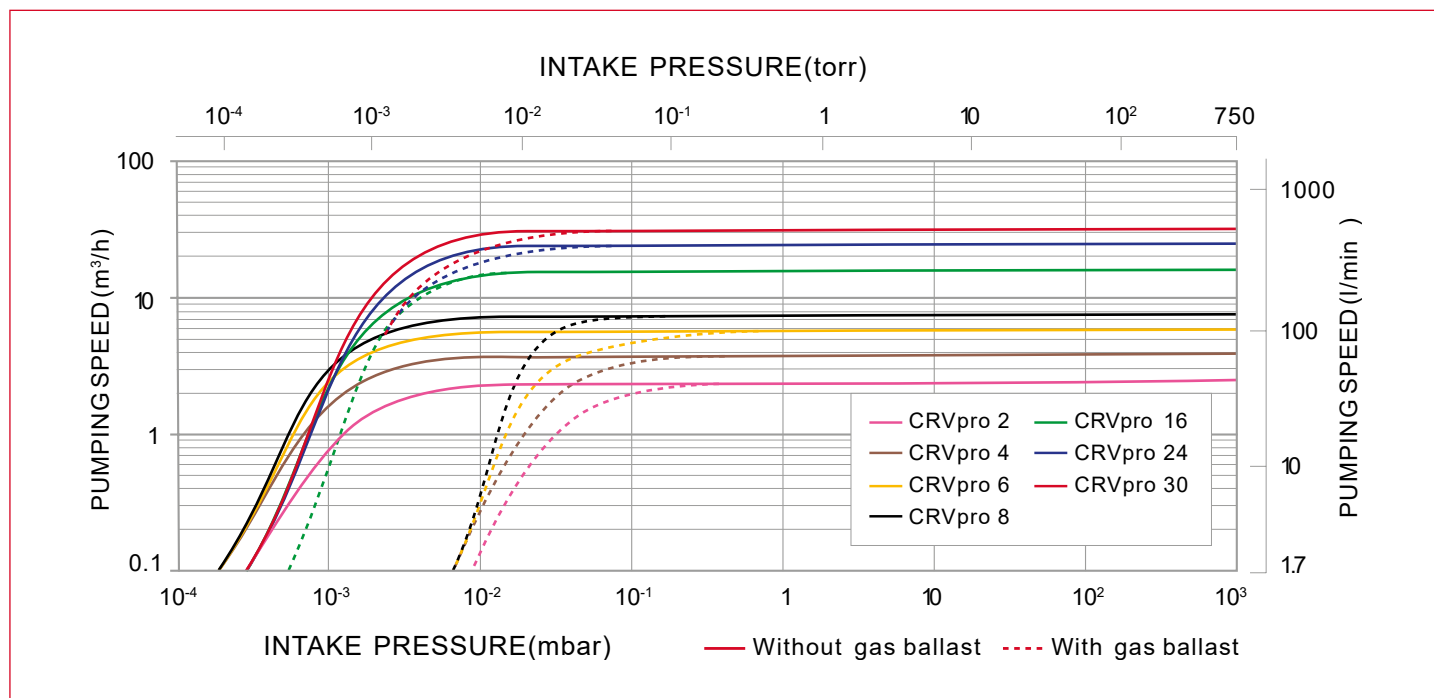PERFORMANCE



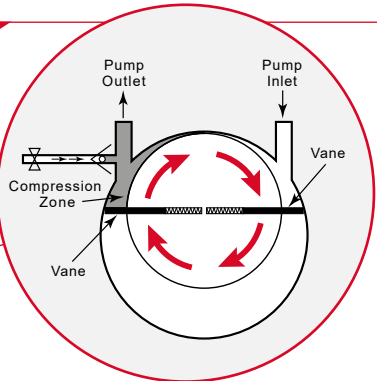

Port enables use of dry inert gas for gas ballast

NEW CRVpro GAS BALLAST SYSTEM

System allows inert dry gas or outside air to be injected with a M5(f) inlet port. Gas ballast reduces condensable vapors in the oil case by introducing a small amount of air into the compression area in the second stage of the pump. This reduces condensed vapor from mixing with pump oil (which extends service intervals by maintaining oil integrity) while slightly degrading ultimate vacuum. Some applications benefit from inert dry gas instead of air.

	CRVpro 2 ¹	CRVpro 4 ¹	CRVpro 6 ¹	CRVpro 8 ¹	CRVpro 16 ¹	CRVpro 24 ¹	CRVpro 30 ¹
	3021-01	3041-01	3061-01	3081-01	–	–	–
	–	–	–	3081-02	3161-02	–	–
	–	–	–	–	3161-01	3241-01	3301-01
	3022-01	3042-01	3062-01	3082-01	3162-01	3242-01	3302-01
	3022-00	3042-00	3062-00	3082-00	3162-00	3242-00	3302-00
	3023-00	3043-00	3063-00	3083-00	3163-00	3243-00	3303-00
	–	3047T-01 ²	–	3087T-01 ²	3167T-01 ²	–	3307T-01 ²
	–	3046E-01 ^{2,3}	–	3086E-01 ^{2,3}	3166E-01 ^{2,3}	–	–
	–	3049E-01 ^{2,4}	–	3089E-01 ^{2,4}	–	–	–
	S3346-99	S3077-99	S3078-99	S3079-99	S3193-99	S3194-99	S3195-99
	S3344-99	S3080-99			S3192-99		
	S3256-99						

Note 2: Always use a certified electrician for proper installation of pumps with 3 phase or explosion proof pumps motors. Conduit wiring required. No cord, plug, or switch included, 3 phase, CE, cUL on motors only. Note 3: 60Hz Explosion proof motor rating is Class 1, Groups C&D; Class 2, Groups E, F&G. Note 4: 50 Hz Explosion Proof motor rating is class 1, Group D; Class 2, Groups F&G.

ACCESSORIES

PREMIUM VACUUM PUMP OIL



8995P-15

A triple-distilled hydrocarbon oil using severely hydrotreated base stock is designed to resist breakdown at higher RPMs and operating temperatures of direct-drive vacuum pumps. This hydrotreating virtually eliminates aromatics and sulfur to give good resistance to sludge and varnish formation over time in corrosive environments. The absence of inhibitors and additives reduces the contamination risks when oil interacts with a user's chemistry. Premium oil enables direct-drive vacuum pumps to maintain the highest vacuum performance over time. The oil is light yellow.

- Low vapor pressure
- Designated for high RPM direct drive vacuum pumps
- No additives or inhibitors to react with user chemistry
- Recommended for Welch direct-drive vacuum pumps

ORDERING INFORMATION

Size	Liter	Gallon	5 Gallon
CAT. No.	8995P-11	8995P-15	8995P-20

INLET ACCESSORIES



320016



1420H-14



1420H-20



705179

DESCRIPTION

ORDER NO.

	CRVpro 2,4,6,8	CRVpro 16,24,30
Inlet condenser: AKS16 for CRVpro 2,4,6,8. AKS25 for CRVpro 16,24,30	320016	320018
Replacement condenser for 320016 and oil mist filter 700010	800160	
Cold trap, requires 7/16" ID gum rubber hose	1420H-14	—
Acid neutralization trap	1420H-21 (CRVpro 2,4 only) 1420H-20 (CRVpro 6,8 only)	
Cold trap, welded DN 25 KF (adapter 701401 needed for CRVpro 4,6,8)	705121	
Fine vacuum adsorption trap: NW16 for CRVpro 2,4,6,8. NW25 for CRVpro 16,24,30	705179	705180

HOSE AND CONNECTIONS



331040-5



302202



303101



710764

DESCRIPTION

ORDER NO.

	CRVpro 2,4,6,8	CRVpro 16,24,30
ID red gum rubber hose, 5ft.	331040-5	331060-5
ID red gum rubber hose, 10ft.	331040-10	331060-10
Chemical resistant metal hose, 1m	710764	710765
Hinge clamp	302201	302202
Centering ring	303101	303102

OUTLET ACCESSORIES

NEW



1417E

NEW WELCH EXHAUST FILTER WITH COALESCED OIL DRAINBACK FEATURE

- Coalesced oil drains back into pump oil case to reduce oil consumption and enables a clean work space
- Exhaust can be directed into existing fume hood
- Reduces pump noise
- Filters to 0.3 micron particle size
- See table below for sizes, connections, and Welch Pump compatibility
- 1417E has NW16 connections. 1417F has NW25 connections



320015

DESCRIPTION	ORDER NO.	
	CRVpro 2,4,6,8	CRVpro 16,24,30
Welch exhaust filter with oil return	1417E	1417F
Replacement element for 1417E and 1417F Exhaust Filters	1417R	1417H-01
AKD Oil Mist separator	320015	–
Cartridge for Oil Mist Filter, for type OME 10/16, OME 10/25 (and AKD)	800160	–
Directional exhaust, metal	1417C	1417D
Replacement element for 1417C and 1417D	1417G	1417H

APPLICATION KITS AND ADAPTER



701401



330031



330044



700048

DESCRIPTION	ORDER NO.	
	CRVpro 2,4,6,8	CRVpro 16,24,30
Adaptor NW 16 to NW25, for intake or exhaust	701401*	–
Freeze dryer adapter kit with ball valve	330031	–
Vacuum concentrator adapter kit	330044	–
Ball Valve. 700047 has NW16 connections. 700048 has NW25 connections.	700047	700048

*Included in CRVpro 2,4,6,8 models with -01 suffix.

GENERAL CONTACT

EMEA

Gardner Denver Thomas GmbH
Am Vogelherd 20
98693 Ilmenau
Germany

Tel: +49 3677 604 1000
Fax: +49 3677 604131
welch.emea@gardnerdenver.com

GLOBAL HEADQUARTERS

Gardner Denver Thomas GmbH
Livry-Gargan-Str. 10
82256 Fürstenfeldbruck
Germany

Tel: +49 81412280 1000
Fax: +49 81418892136
welchvacuum@gardnerdenver.com

AMERICAS

Gardner Denver Thomas, Inc.
1601 Freehanville Drive
Suite 550
Mt. Prospect, IL 60056
USA

Tel: +1847 676 8800
Fax: +1847 6778606
welch.na@gardnerdenver.com

ASIA PACIFIC

Gardner Denver Welch
Room 2206, Qiangsheng Mansion
No. 145 Pujian Road
200127 Shanghai
China

Tel: +86 2151860238
Fax: +86 2150396221
welch.as@gardnerdenver.com

Distributed By:

Camlab Ltd
Unit 24, Norman Way Industrial Estate
Over, Cambridge, CB24 5WE, United Kingdom
T: +44 (0) 1954 233 110 E: sales@camlab.co.uk



Please check out all our brands for your mission-critical flow control technologies:



OEM Pumps
www.gd-thomas.com



Vacuum Pumps & Systems
www.welchvacuum.com



Syringe Pumps
www.tricontinent.com



Lab Automation
www.zinsser-analytic.com



Syringes
www.microsyringes.com