


Soil Salinity Measurement in Almond Orchard

Crops have different levels of tolerance to salinity. Testing soil salinity is the best way to check soil condition in the orchard before salt damage occurs. The EC_{1:5} test is used to estimate soil salinity (EC_e). The soil salinity threshold value for almond is 1.5 mS/cm.

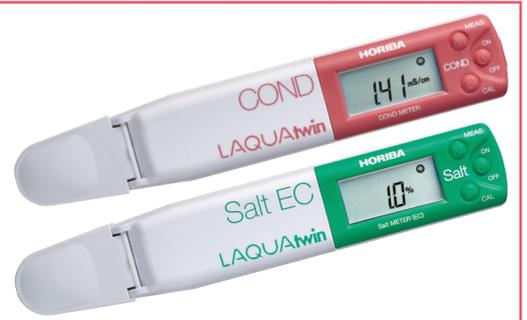

Introduction

Soils with high concentration of salts can induce salinity stress and restrict the growth of salt-sensitive plants. Among the factors that can cause salinity stress (See Figure 1), toxicity of ions, usually sodium (Na), chloride (Cl), and boron (B), is the most common that result in leaf tissue damage. In the orchard, the most typical salt damage observed is "leaf-tip burn" (See Figure 2) and the best way to prevent it is by monitoring the soil salinity. The advantage of soil salinity monitoring is remedial action can be performed on soil before symptoms on leaf tissue appear. Annual testing of soil samples from selected locations in the orchard should be part of every growers' management program.



Figure 2: Leaf-tip Burn in Almond Orchard
Source: Rosenzweig, B. (2016). Soil Salinity Management.

Based on the Australian Soil Fertility Manual published by Commonwealth Scientific and Industrial Research Organization (CSIRO), sodium chloride (NaCl) is the major offender in the development of saline soils in Australia. The LAQUA twin Salt 11 pocket meter can be used to measure NaCl concentration in soils. The meter measures the conductivity of the sample and converts it to salinity reading in either parts per thousand (g/L) or percentage (%) unit.

Components of Salinity Stress
How does salinity harm plants?

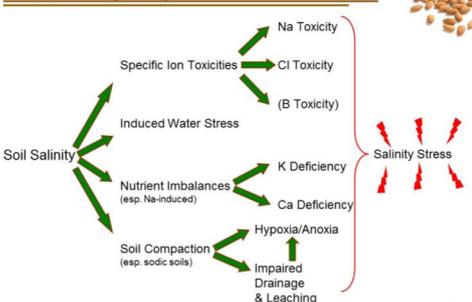


Figure 1: Components of Salinity Stress
Source: Rosenzweig, B. (2016). Soil Salinity Management.

Electrical conductivity (EC) is the method used to measure soil salinity, which is influenced by the concentration and composition of dissolved salts. Salts increase the ability of a solution to conduct an electrical current, so a high EC value indicates high salinity. The LAQUA twin EC 11, 22 and 33 conductivity pocket meters measure electrical conductivity in drops or micro-volume samples and display reading in just few seconds. The replaceable sensor is made of two flat titanium metals coated with platinum black that resist corrosion. The meters are programmed with standard recognition function for automatic calibration and automatic temperature compensation (ATC) function for accurate measurement.

Method

A. Soil Sample Collection

Select representative sites in the orchard for routine sampling.

Drip Irrigated Orchards

Collect double handful of soil from two locations—20cm from the dripper and on the edge of the wetted area ~ approx. 60cm from the dripper. Soil should be drawn from two or three depths in the root zone—every 30cm down to 1m. Place soil sample from each depth/location in a bag for analysis.

Continued at the back

Sprinkler Irrigated Orchards

The sampling is similar to that of drip irrigated orchards, except three locations are sampled—2 meters of a sprinkler, 1/3 distance between sprinklers on a diagonal, and middle of the sprinkler pattern. If the irrigation system has a designed and measured distribution uniformity of $\geq 80\%$ or salinity results from 2 or more years indicate there is no variation by location, then the number of locations could be decreased.

B. Soil Salinity Measurement

1. Allow the soil sample to dry by leaving the sample bag or container open for at least a day. It can be oven-dried on a tray in a cool oven.
2. Crush dried sample with a mortar and pestle, rolling pin or hammer so there are no large aggregates (clods of soil 2mm or larger). Remove any foreign matter, plant matter, and stones from the sample.
3. Add 1 part soil for every 5 parts distilled or deionized (DI) water. For example, mix 50g soil and 250ml DI water in a container.
4. Shake the container for 3 minutes to dissolve the salts. For clay loams and clay soils, more shaking (for 1 minute every 3 minutes, repeat 3 times) will dissolve more salts and increase the accuracy of the test.
5. While allowing the solution to settle for a minute before testing, calibrate the LAQUAtwin EC 11, 22 or 33 pocket meter with 1413 μ S/cm and 12.88mS/cm conductivity standards included in the kit. Rinse the conductivity sensor with DI water and blot dry with soft tissue between standards and after calibration.

6. Immerse the conductivity sensor in the solution (without touching the soil in the bottom of the container) and record the $EC_{1:5}$ reading once it has stabilized. Alternatively, place drops of solution onto the sensor using the pipette included in the kit.
7. Rinse the conductivity sensor with DI water and blot dry with soft tissue.
8. Convert the $EC_{1:5}$ reading to actual soil salinity (EC_e) by multiplying the value by the conversion factor based on the texture of the soil sample (Refer to Table 1 below).

Table 1: $EC_{1:5}$ to EC_e Conversion Factors

Soil Texture	Multiplication Factor
Sands	17
Sandy Loams	13.8
Loams	9.5
Clay Loams & Light Clays	8.6
Medium & Heavy Clays	7

Note: These factors are calibrated for southern NSW (AU) soils
Source: Gibbs, S. (2000). Salinity Notes: How to Texture Soils & Test for Salinity.

Results and Benefits

Monitoring soil salinity can help identify the current soil conditions, predict problems, and establish baseline for management decisions. Crops have different levels of tolerance to salinity. The soil salinity threshold value for almond is 1.5 mS/cm. Table 2 below shows the salt tolerance data for selected crops.

Soil salinity derived from electrical conductivity (EC) measurements in the field or laboratory are often reported with subscript abbreviations to indicate the origin of the sample tested and the method used to determine the salinity. Common abbreviations and their descriptions are explained below.

- $EC_{1:5}$ – test used to estimate soil salinity (EC_e). It is determined by mixing 1 part

soil with 5 parts DI water. After mixing the sample and allowing the sediments to settle, the electrical conductivity of the solution is tested.

- EC_e – the estimated amount of salt in the soil. $EC_e = EC_{1:5} \times$ conversion factor (based on soil texture)
- EC_{se} – the electrical conductivity of a saturated soil extract, which should be conducted by a National Association of Testing Authorities, Australia (NATA) accredited laboratory. $EC_{se} = EC_e$

A soil salinity test gives an indication on the soil conditions around the plant roots, taking into account the influence of soil texture. Texture is an estimate of the relative amounts of sand, silt, and clay particles in a soil. It affects fertility, water holding capacity, internal drainage, irrigation scheduling, and soil workability for tillage. Soil texture usually changes with depth. To guide you identify soil texture, refer to *Salinity Notes: How to Texture Soils & Test for Salinity* by Simon Gibbs.

Table 2: Salt Tolerance Data for Selected Crops

Crop	Soil Salinity EC_{se} (mS/cm)*			
	0% Yield Loss	10% Yield Loss	25% Yield Loss	50% Yield Loss
Almond	1.5	2.0	2.8	4.1
Avocado	1.3	1.8	2.5	3.7
Citrus	1.7	2.3	3.3	4.8
Date Palm	4.0	6.8	11.0	18.0
Lucerne	2.0	3.4	5.4	8.8
Olive	2.7	3.8	5.5	8.4
Onion	1.2	1.8	2.8	4.3
Pistachio	4.0	4.5	5.0	6.0
Pomefruit	1.7	2.3	3.3	4.8
Potato	1.7	2.5	3.8	5.9
Stonefruit	1.7	2.2	2.9	4.1
Tomato	2.5	3.5	5.0	7.6
Vine	1.5	2.5	4.1	6.7
Beans	1.0	1.5	2.3	3.6
Eggplant	1.1	2.5	4.7	8.3
Cucumber	2.5	3.3	4.4	6.3
Capsicum	1.5	2.2	3.3	5.0

*Equivalent to dS/m

Source: Irrigation Management Training. Measuring Soil Salinity.

References and Suggested Readings

1. Rosenzweig, B. (2016). Soil Salinity Management. Available at <https://growing.australianalmonds.com.au/2016/02/28soil-salinity-management/> (Accessed 30 December 2016).
2. Gibbs, S. (2000). Salinity Notes: How to Texture Soils & Test for Salinity. Number 8, ISSN 1 325-4448. Available at http://www.dpi.nsw.gov.au/_data/assets/pdf_file/0008/168866/texture-salinity.pdf (Accessed 30 December 2016).
3. NSW Government Department of Primary Industries. How salinity is measured. Available at <http://www.dpi.nsw.gov.au/land-and-water/soils/salinity/general-information/measuring> (Accessed 30 December 2016).
4. Irrigation Management Training. Measuring Soil Salinity. Available at http://www.growingcapsicums.com.au/pdf/6_salinity/measuring_soil_salinity.pdf. (Accessed 23 January 2017)

Revision 1.0, 23 January 2017

LAQUAtwin Pocket Ion Meters Lineup



HORIBA Instruments (Singapore) Pte. Ltd.
83 Science Park Drive, #02-02A, The Curie, Singapore 118258
Phone: 65 6908-9660
Fax: 65 6745-8155
www.horiba-laqua.com
e-mail: laqua@horiba.com

HORIBA UK Limited
Kyoto Close, Moulton Park, Northampton NN3 6FL
Phone: 44 (0) 1604 542567
Fax: 44 (0) 1604 542699
www.horiba.com/uk



www.horiba-laqua.com

IMS
HORIBA Group is operating Integrated Management System (IMS)
ISO9001 JOA-0298 / ISO14001
JOA-E-90039 / ISO13485
JOA-MD0010 / OHSAS18001 JOA-OH0068Rorum perid novis esimoente,

